


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tyre sizes: 28 mm to 62 mm (1.1" to 2.5")

## REFERENCES WHEELS

F69751	XmElite27.5FiBoostWTS BK	P83161	XmaxElite27.5PrWTS Rd
F69752	XmElite27.5FiBoostWTS Red	F55001	XmElite27.5FiWTS BK
F69761	XmElite27.5FiSpWTS BK	F55002	XmElite27.5FiWTS Red
P83151	XmaxElite27.5PrWTS BK		

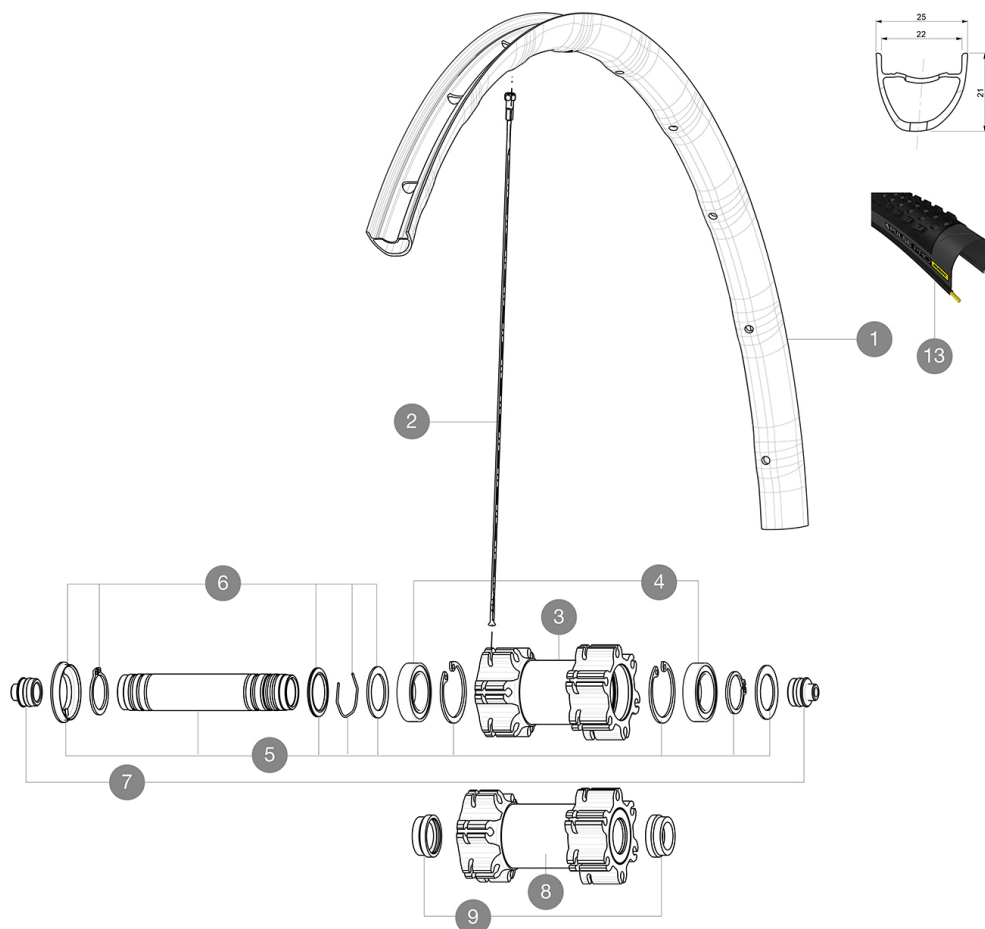

## RIMS



Ø VALVE HOLE (MM): 6,5 :

1	V3140115	SET Front/Rear rim XMAX ELITE 27,5" 22TSS red
1	V3120115	SET Front/Rear rim XMAX ELITE 27,5" 22TSS black

## SPOKES

2	V2381101	12 FRT + REAR NON-DRIVE SIDE SPOKES 277mm CROSSRIDE TUBELESS 27,5
---	----------	---

## MOYEUX






3	N/A	HUB BODY
3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
6	V2370301	FRONT AUTO ADJUST.PLAY KIT 15MM AXLE
7	B4104401	15mm FT Road Axle Adapters 16
8	N/A	HUB BODY
8	N/A	HUB BODY
10	V2371301	YELLOW AXLE SUPPORTS FRONT BOOST 110mm FOR SELF ADJUSTING
11	N/A	AXLE SYSTEM
12	M40771	BEARING KIT FOR LEFTY HUB
13	36709301	ASSEMBLY KIT CROSSROC SUPERMAX

## TYRES

14	39243132	Pulse Pro 27,5" 2.25
14	39243121	Pulse Pro 27,5" 2.1

# MAVIC Crossmax Elite 27.5

## DELIVERED WITH

BR101 rear quick release (M40352) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear 12x142mm adapters for Instant Drive 360 (B49 896 01 for ID360 6T, B49 899 01 for ID360 CL) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
Tubeless rim tape	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

## Specifications

### RIMS

- **Material** : Mactal
- **Joint** : SUP
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 22 mm
- **ETRTO size 27.5"** : 584x22ss
- **ETRTO size 29"** : 622x22ss

Hookless profile  
Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black or Black/Red
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax

### WHEEL WEIGHTS

- Wheel weight
- Weight Front 27.5": 750
- Weight Front 29": 785