


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tyre sizes: 28 mm to 62 mm (1.1" to 2.5")

## REFERENCES WHEELS

P83141	XmaxProPr29WTS	R96261	XmaxProRrBoostXD29WTS
R81501	XmaxProRr29WTS	R96321	XmaxProRrBoost29NT
R96231	XmaxProRrXD29WTS	R96331	XmaxProRrBoostXD29NT
R96241	XmaxProRrBoost29WTS		

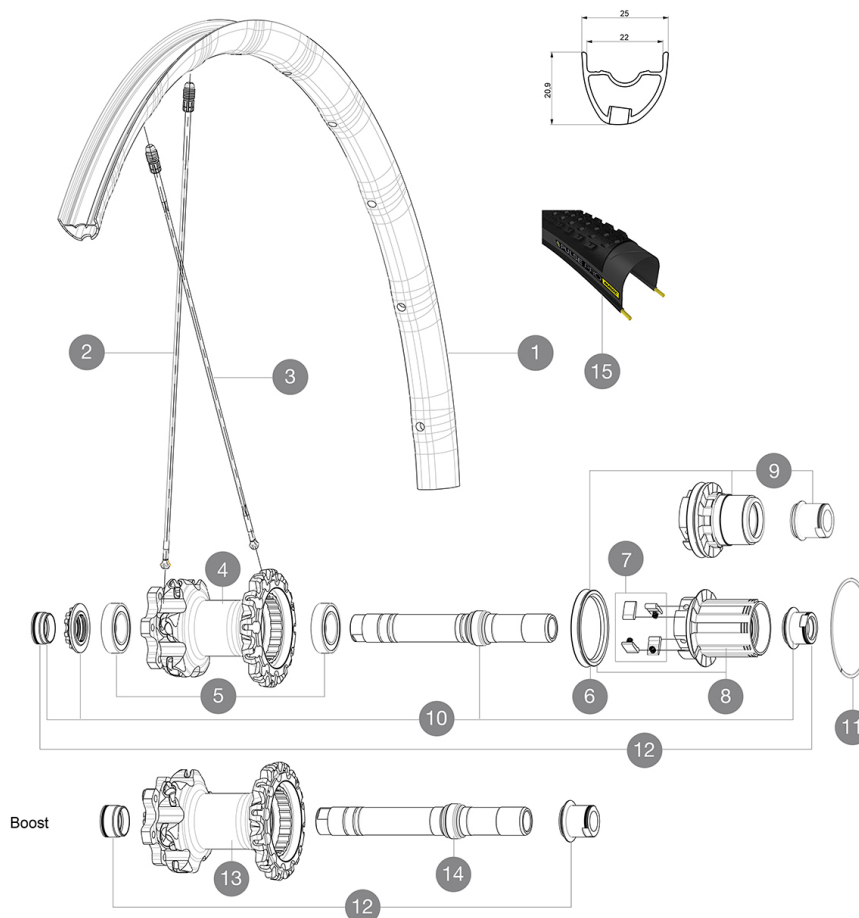

## RIMS



Ø VALVE HOLE (MM): 6,5 :

1	V2316313	KIT REAR RIM CROSSMAX PRO 29" 22TSS
---	----------	-------------------------------------

## SPOKES

2	V2384801	KIT 12 FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES 293mm
3	A7209901	SPOKE FRONT 29" DRIVE SIDE CROSSMAX XL 29"

## MOYEURS

4	N/A	HUB BODY
5	M40076	FRONT HUB 6903 BEARINGS
6	99610701	ITS4 SEAL
7	99610601	ITS4 PAWLS KIT
8	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
9	35684101	ITS-4 FREEWHEEL BODY XD +SEAL 2013 (WITHOUT PAWLS)
10	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
11	30871801	ELASTIC RING 56mm diam.
12	30872201	FORK REST ITS-4 135mm REAR AXLE 2012
13	N/A	HUB BODY
14	V2371201	KIT REAR QRM AXLE 135-142mm/BOOST 148mm

## TYRES

15	39243221	Pulse Pro 29" 2.1
15	39243232	Pulse Pro 29" 2.25

# MAVIC Crossmax Pro 29

## DELIVERED WITH

Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear 12x142mm adapters for Instant Drive 360 (B49 896 01 for ID360 6T, B49 899 01 for ID360 CL) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

## Specifications

### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)  
Lefty Supermax

### WHEEL WEIGHTS

Wheel weight