


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg  
Recommended tire sizes: 35 mm to 69 mm (1.4" to 2.7")

## REFERENCES WHEELS

F70221	XA Elite 29 Ft Black	F70393	XAElite29FtBoost Blue
F70222	XA Elite 29 FtGreen	F70401	XAElite29FtSpx Black
F70223	XA Elite 29 Ft Blue	P83211	XA Elite 29 Pr Black
F70391	XAElite29FtBoost Black	P83221	XA Elite 29 Pr Green
F70392	XAElite29FtBoostGreen	P83411	XA Elite 29 Pr Blue

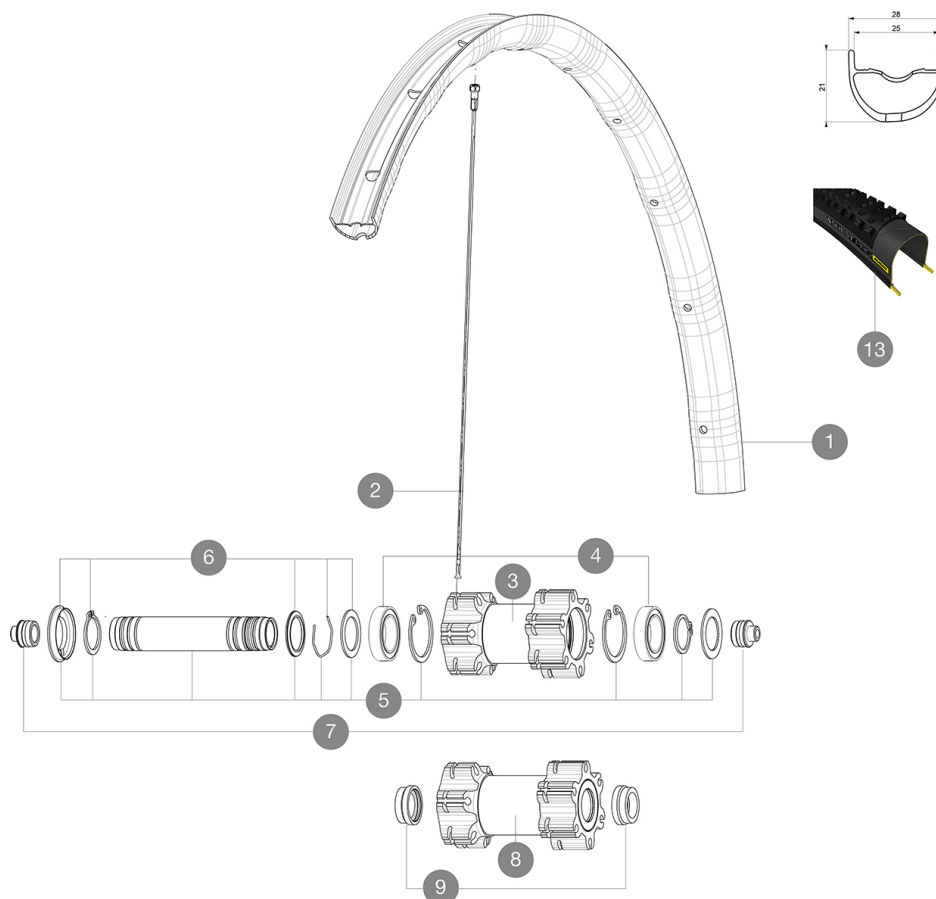

## RIMS



Ø VALVE HOLE (MM): 6,5 :

1	V3210115	SET Front/Rear rim XA ELITE 29" 25TSS blue
1	V3190115	SET Front/Rear rim XA ELITE 29" 25TSS green
1	V3170115	SET Front/Rear rim XA ELITE 29" 25TSS black

## SPOKES

2	V2381401	12 REAR DRIVE SIDE SPOKES 295mm CROSSRIDE TUBELESS 29
---	----------	---

## MOYEURS






3	N/A	HUB BODY
3	N/A	HUB BODY
3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/CROSSRIDE/CROSSROC
6	V2370301	FRONT AUTO ADJUST.PLAY KIT 15MM AXLE
7	B4104401	15mm FT Road Axle Adapters 16
8	N/A	HUB BODY
8	N/A	HUB BODY
8	N/A	HUB BODY
9	V2371301	YELLOW AXLE SUPPORTS FRONT BOOST 110mm FOR SELF ADJUSTING
10	N/A	AXLE SYSTEM
11	M40771	BEARING KIT FOR LEFTY HUB
12	36709301	ASSEMBLY KIT CROSSROC SUPERMAX

## TYRES

13	39243433	Quest Pro 29x2.35
----	----------	-------------------

# MAVIC XA Elite 29

## DELIVERED WITH

BR101 quick releases (M40350 firt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear QR adapters (308 731 01) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
Tubeless rim tape	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: convertible from Quick Release to 12mm thru axle with included adapters	

## Specifications

### RIMS

- **Material** : Mxxtal
  - **Joint** : SUP
  - **Drilling** : traditional
  - **Weight reduction** : ISM 4D
  - **Valve hole diameter** : 6.5 mm
  - **Tire** : UST Tubeless and tubetype
  - **Internal width** : 25 mm
  - **ETRTO size 27.5"** : 584x25ss
  - **ETRTO size 29"** : 622x25ss
- Hookless profile  
Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black or Black/Blue or Black/Green
  - **Disc standard** : 6 Bolts only
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax

### WHEEL WEIGHTS

- Wheel weight
- Weight Front 27.5": 780
  - Weight Front 29": 815