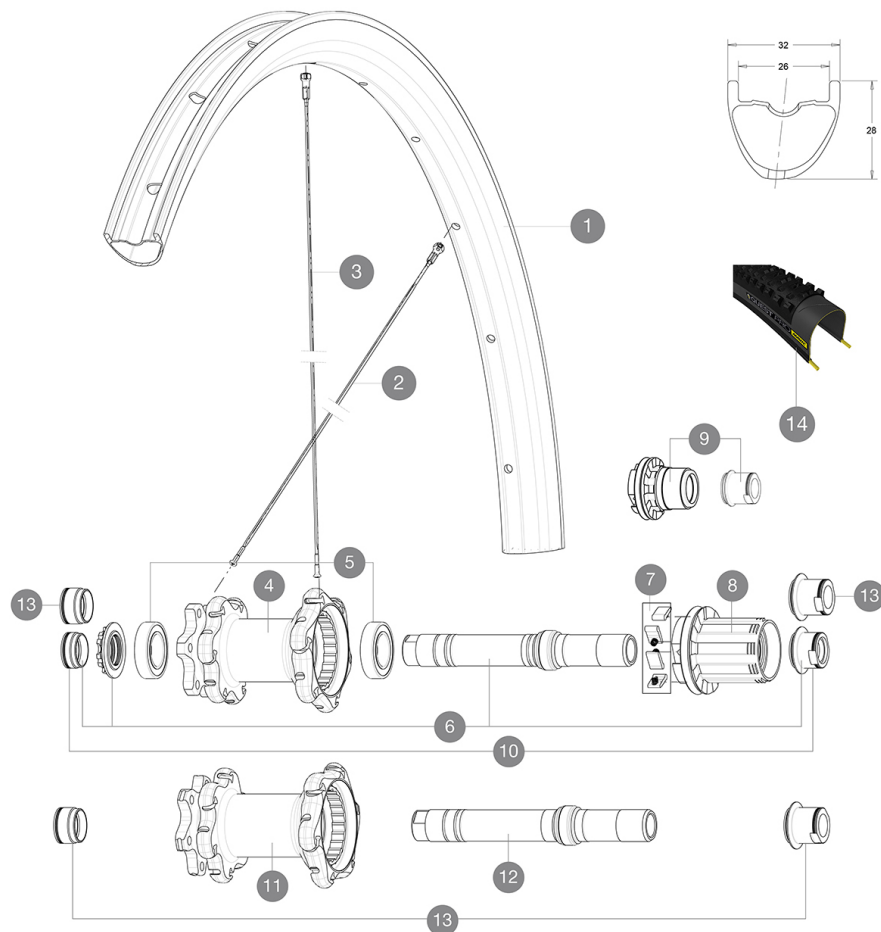


**MAVIC** XA Pro Carbon

ASTM CATEGORY 3 : offroad with jumps less than 61cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 35 mm to 69 mm (1.4" to 2.7")

**REFERENCES WHEELS**

P83231	XAProCarb27.5PrWTS	R99071	XAProCarb27.5RrBoostXDWTS
R97811	XAProCarb27.5RrBoostWTS	R99691	XaPC27.5Rr12x146XDNTSMURd
R99061	XAProCarb27.5Rr142XDWTS	R83501	XAProCarbon27.5RrWTS

**RIMS**

Ø VALVE HOLE (MM): 6,5 :

1	V3230113	SET Rear rim XA PRO CARBON 27,5"
---	----------	----------------------------------

**SPOKES**

2	V2385001	KIT 12 FRONT + REAR NON-DRIVE SIDE BUTTED SPOKES 272mm XA PRO
3	V2384901	KIT 12 REAR DRIVE SIDE BUTTED SPOKES 270mm XA PRO CARBON 27,5"

**MOYEURS**







4	N/A	HUB BODY
5	M40076	FRONT HUB 6903 BEARINGS
6	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
7	99610601	ITS4 PAWLS KIT
8	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
8	99610701	ITS4 SEAL
9	35684101	ITS-4 FREEWHEEL BODY XD +SEAL 2013 (WITHOUT PAWLS)
10	30872201	FORK REST ITS-4 135mm REAR AXLE 2012
11	N/A	HUB BODY
12	V2371201	KIT REAR QRX AXLE 135-142mm/BOOST 148mm
13	30859301	X-12 adapters old 142mm grey

**TYRES**

14	39243324	Quest Pro 27,5x2.40
----	----------	---------------------

# MAVIC XA Pro Carbon

## DELIVERED WITH

1 bottle of Mavic Sealant (355 466 01) 1	
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Multifunction adjustment wrench (325 423 01) 1	
User guide	

## COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

## Specifications

### RIMS

- **Material** : 100% Unidirectional carbon fiber
  - **Drilling** : traditional
  - **Valve hole diameter** : 6.5 mm
  - **Tire** : UST Tubeless and tubetype
  - **Internal width** : 26 mm
  - **ETRTO size 27.5"** : 584x26ss
  - **ETRTO size 29"** : 622x26ss
- Hookless profile  
Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy

### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

### WHEEL WEIGHTS

- Wheel weight  
Weight Rear 27.5": 835  
Weight Rear 29": 855